

HindPhotostat



Hind Photostat & Book Store

Best Quality Classroom Topper Hand Written Notes to Crack GATE, IES, PSU's & Other Government Competitive/ Entrance Exams

MADE EASY **ELECTRICAL ENGINEERING** Network Theory By.Aditya Sir

- Theory
- Explanation
- Derivation
- Example
- Shortcuts
- Previous Years Question With Solution

Visit us:-www.hindphotostat.com

Courier Facility All Over India
(DTDC & INDIA POST)
Mob-9311989030



HindPhotostat



MADE EASY, IES MASTER, ACE ACADEMY, KREATRYX

**ESE, GATE, PSU BEST QUALITY TOPPER HAND WRITTEN NOTES
MINIMUM PRICE AVAILABLE @ OUR WEBSITE**

- | | |
|--------------------------------|---------------------------|
| 1. ELECTRONICS ENGINEERING | 2. ELECTRICAL ENGINEERING |
| 3. MECHANICAL ENGINEERING | 4. CIVIL ENGINEERING |
| 5. INSTRUMENTATION ENGINEERING | 6. COMPUTER SCIENCE |

IES, GATE, PSU TEST SERIES AVAILABLE @ OUR WEBSITE

❖ IES –PRELIMS & MAINS

❖ GATE

➤ **NOTE;- ALL ENGINEERING BRANCHS**

➤ **ALL PSUs PREVIOUS YEAR QUESTION PAPER @ OUR WEBSITE**

PUBLICATIONS BOOKS -

**MADE EASY, IES MASTER, ACE ACADEMY, KREATRYX, GATE ACADEMY, ARIHANT, GK
RAKESH YADAV, KD CAMPUS, FOUNDATION, MC –GRAW HILL (TMH), PEARSON...OTHERS**

HEAVY DISCOUNTS BOOKS AVAILABLE @ OUR WEBSITE

F230, Lado Sarai New Delhi-110030 Phone: 9311 989 030	Shop No: 46 100 Futa M.G. Rd Near Made Easy Ghitorni, New Delhi-30 Phone: 9711475393	F518 Near Kali Maa Mandir Lado Sarai New Delhi-110030 Phone: 9560 163 471	Shop No.7/8 Saidulajab Market Neb Sarai More, Saket, New Delhi-30
-------------------------------------------------------------	--------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------	----------------------------------------------------------------------------

Website: www.hindPhotostat.com

Contact Us: 9311 989 030

**Courier Facility All Over India
(DTDC & INDIA POST)**

NETWORK THEORY

-Aditya sir

ESE: 22-24 M

≈ 14 que.

Gate: 10M

① Topics:


- ① Basics :
- ϕ, I, V, P, N
 - R.L.C
 - KVL, KCL, ohm's Law
 - Mesh Nodal
 - Equivalent R.L.C, Z

- ② Two-port Network:
- Parameters (Z, Y, h, g, T, t)
 - Interconnection
 - Gyration

- ③ Theorems :
- Superposition
 - Thevenin
 - Nortons
 - Maximum power Transfer
 - Reciprocity
 - Millman's
 - Compensation
 - Substitution
 - Tellegen's theorem
- Gate
- ESE

- ④ Transient :
- 1st order circuit (RC, RL)
 - 2nd order circuits
 - Initial condition
 - Laplace transform

①

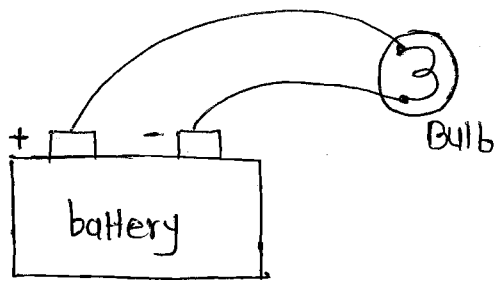


Electrical circuit : our main Aim is to transfer the energy from one point to another point. Hence for this we require an interconnection between electrical compo.

Interview

Highest basic quantity in electrical Network :

Charge

②

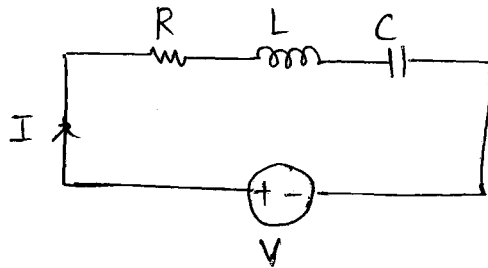

① Charge : charge is the electrical property of the atomic particles of which the matter consists of. (C)

[Electrical Property \rightarrow Atomic Particles \rightarrow Matter]

charge on $1e^- : -1.6 \times 10^{-19} C$

Coulomb is the large unit of charge.

Que: How many electrons contribute towards 1C of charge?

Solⁿ : $1e^- = 1.6 \times 10^{-19} C$

$$1C = \frac{1}{1.6 \times 10^{-19}} e^- s$$

$$1C = 6.24 \times 10^{18} e^- s$$

③ Law of conservation of charge:

It states that, charge can neither be created nor be destroyed. It can be only transferred from one body to another body.

Any eqⁿ with the help of show Law of conse. of Charge.

Continuity Eqⁿ : $\nabla \cdot \vec{J} = -\frac{d\rho_v}{dt}$

La-2

② Current : The Flow of the electrons or the time rate of change of charge through any cross-section is called as a current. (C/s or Amp)


$$I_{av} = \frac{\Delta q}{\Delta t} \text{ C/s or Amp.}$$

• Instantaneous current $i(t)$:

$$i(t) = \lim_{\Delta t \rightarrow 0} \frac{\Delta q}{\Delta t} = \frac{dq}{dt}$$

$$i(t) = \frac{dq}{dt}$$

• Direction of current in electrical circuit :

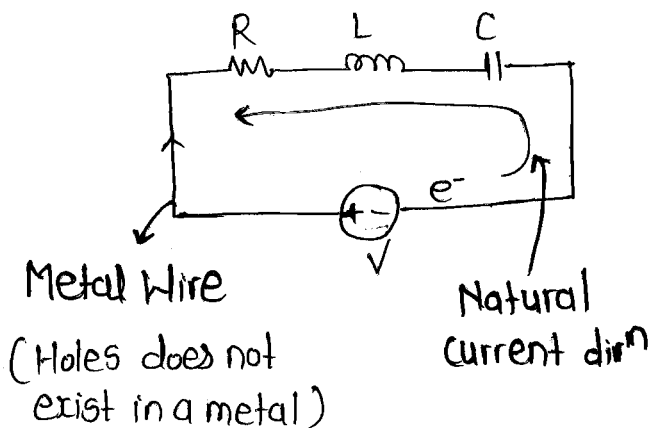


Conventionally, $\text{---} \rightarrow$ the current direction is taken in the direction of the positive charge moment.

Naturally, $\text{---} \rightarrow$ the current direction is in the direction of the flow of electrons.

③ Voltage : ① To move the electron from one point to Another Point in a particular direction & external force is required & in an electrical circuit this force is provided by the electromotive force (EMF) & it is given by

$$E = V = \frac{dW}{dq} \text{ J/C or V}$$


② Voltage or potential difference is the energy required to move a unit charge through an element.



Energy gained by the mass in moving from pt. ① to ② :

$$= mg(h_1 - h_2)$$


gravitational potential diff.




Energy gained by the charge in moving from pt ① to ② :

$$= q(V_1 - V_2)$$

Electrical potential difference.



Que:




① $V_A > V_B$

② $V_A = V_B$

③ $V_A < V_B$

④ Cant comment

Solⁿ:

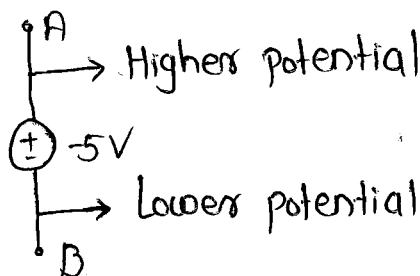

Higher Pot. - Lower Pot. = -5V

$V_A - V_B = -5V$


$V_A = V_B - 5$

④ Power: It is the time rate of change of Energy [expending or absorbing] and (Watts)

$$P = \frac{dW}{dt} \quad \text{J/s or W}$$


$$P = \frac{dW}{dq} \cdot \frac{dq}{dt}$$

$$P(t) = V(t) \cdot i(t)$$



$$P = +Vi$$

(a)

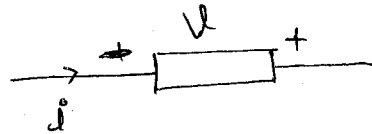

$$P = -Vi$$


(b)

- Whenever we calculate the power by using the formula $V \times I$, we always get the power absorbed.

Fig. (a) Power absorbed or
Power received or
power dissipated

Fig. (b) Power absorbed
is -ve. or
power is getting
delivered
($P_{del} = +Vi$)

Note: ① Whenever current enters into the +ve terminal of the voltage polarity, the element absorbs a power
② And when the current leaves from the +ve terminal or current enters into the -ve terminal, then the element delivers the power.




Power absorbed




Power delivered


- Hence, for determining the sign of the power, the voltage polarity & the ∇ n direction are important.




Power abso.
 \therefore Load




Power deli.
 \therefore Source




Power deli.
 \therefore Source



Power abs.
 \therefore Sink/Load



Power del.
 \therefore Source



Power abs.
 \therefore Load

⊙ Law of Conservation of Energy :

It states that, Energy can neither be created nor be destroyed, It only be transform from one form to another Form.


\therefore In Any Electrical Circuit :

$$\sum P = 0$$

$$\sum P_{del.} = \sum P_{abs.}$$

- The algebraic sum of the power at any instant of time in a circuit must be equal to zero.

Ques-3 Que. Find the power of each element In the below given electrical Network.

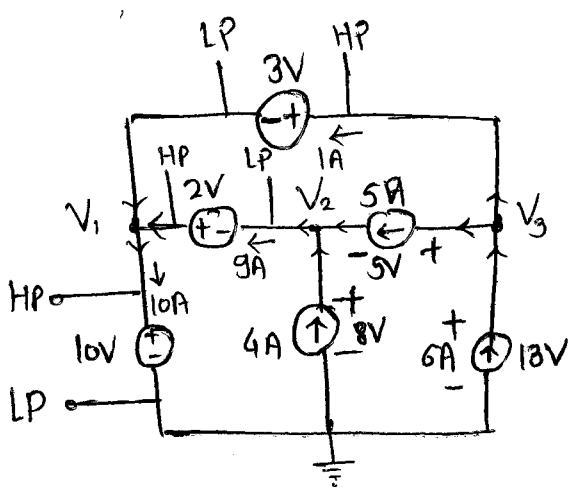

Solⁿ:

$$P_{10V} = +10 \times 10 = +100 \text{ W}$$

$$P_{2V} = -9 \times 2 = -18 \text{ W}$$

$$P_{3V} = +3 \times 1 = 3 \text{ W}$$

• By Nodal Analysis:

$$V_1 - 0 = 10V$$

$$V_1 = 10V$$

$$V_1 - V_2 = 2V$$

$$-V_2 = 2 - 10$$

$$V_2 = 8V$$


$$V_3 - V_1 = 3V$$

$$V_3 = 13V$$

$$P_{4A} = -4 \times 8 = -32 \text{ W}$$

$$P_{5A} = +5 \times 5V = 25 \text{ W}$$

$$P_{6A} = -13 \times 6 = -78 \text{ W}$$



• Not part of Solⁿ:

$$\sum P_{abs.} = +100 + 3 + 25 \quad \text{--- (+ve power)}$$

$$= 128 \text{ W}$$

$$\sum P_{del.} = +8 + 32 + 78 \quad \text{--- (-ve power with +ve sign)}$$

$$= 128 \text{ W}$$

$$\therefore \sum P_{del.} = \sum P_{abs.}$$

Que: How many electrons flow per second through the filament of a 220V & 110W electric bulb.

Solⁿ: $P = V \times I$ $I = \frac{P}{V} = \frac{110}{220} = \frac{1}{2} \text{ Amp}$

$$I = \frac{Q}{t} = \frac{n \cdot e^-}{t}$$

where, n = Total no. of e^-

$$\frac{n}{t} = 3.125 \times 10^{18}$$

$$\therefore \frac{n}{t} = \frac{I}{e^-} = \frac{\frac{1}{2}}{1.6 \times 10^{19}}$$


⑤ Energy: It is the capacity or ability to do the work. (J or Watt-sec)

$$W(t) = \int_0^t P(t) \cdot dt$$

$$W(t) = \int_0^t V(t) \cdot i(t) \cdot dt$$

Que. A fully charged mobile phone with a 12V battery is good for 10 min talktime;
 Assume that during the talktime, battery delivers a constant C/n of 2A and its voltage linearly drop from 12V to 10V as shown in the fig.
 How much energy does the battery delivered during talktime.

Solⁿ: $W = \int_0^t P(t) \cdot dt$
 $= \int_0^t V(t) \cdot i(t) \cdot dt$
 $= 2 \left[\int_0^{10 \text{ min}} V(t) \cdot dt \right]$

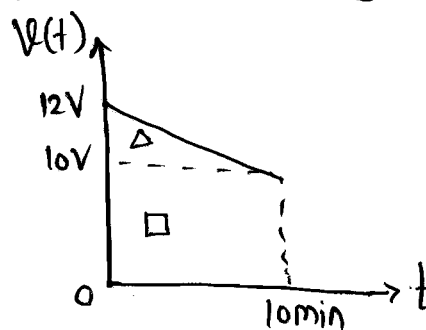


$$= 2 \left[\left(\frac{1}{2} \times 10 \text{ min} \times (12 - 10) \right) + (10 \times 10) \right] \cdot 60$$

$$= 2 [10 + 100] 60$$

$$= 2 \times 6600$$


$$W = 13.2 \text{ KJ}$$

que. A c/n $i(t)$ as shown in the fig. is passed thr a capacitor. A charge in sec acquire by the cap^r in sec. will be ---

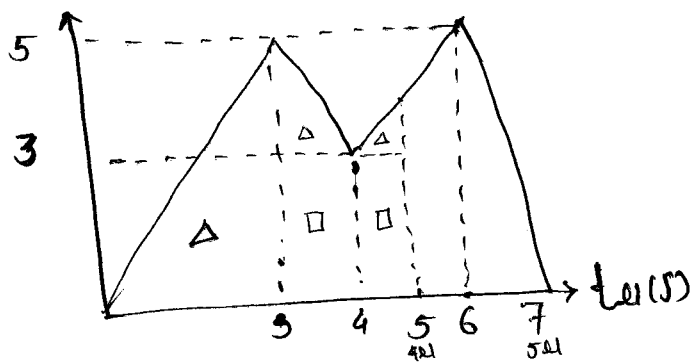$i(t)$ 

$$q(t) = q(0) + \int_0^t i(t) \cdot dt$$

$$q(t) = 0 + \int_0^{5u} i(t) \cdot dt$$



$$\begin{aligned} \text{Area} &= \frac{1}{2}(a-b)c + bc \\ &= \frac{1}{2}ac - \frac{1}{2}bc + bc \\ &= \frac{1}{2}ac + \frac{1}{2}bc \end{aligned}$$

$$\text{Area} = \frac{1}{2}(a+b)c \quad *$$

$$\begin{aligned} \therefore \text{Area} &= \int_0^{3u} i(t) \cdot dt + \int_{3u}^{4u} i(t) \cdot dt + \int_{4u}^{5u} i(t) \cdot dt \\ &= \left[\frac{1}{2} \times 5 \times 3 \right] + \left[\frac{1}{2} (5+3) \cdot 1 \right] + \left[\frac{1}{2} (4+3) \cdot 1 \right] \\ &= \left[\frac{15}{2} + \frac{8}{2} + \frac{7}{2} \right] u \end{aligned}$$

$$q(t) = \frac{30}{2} u$$

$$q = 15uC$$

$$\text{Sol}^n: i(t) = \frac{dq}{dt}$$

$$q = \int_{-\infty}^t i(t) \cdot dt$$

$$q(t) = \int_{-\infty}^0 i(t) \cdot dt + \int_0^t i(t) \cdot dt$$

que: q_n flowing through the ckt. ^{element} is given by.

$i(t) = (8t + 5)A$. Find amount of charge passing thr the element in an interval of 0 to 3 sec.

Solⁿ: Given;

$$i(t) = (8t + 5) \text{ A}$$

$$q(t) = 0 + \int_0^t i(t) dt$$

$$q(t) = 0 + \int_0^3 (8t + 5) dt$$
$$= 8 \cdot \left[\frac{t^2}{2} \right]_0^3 + 5 \cdot [t]_0^3$$

$$= 4(3)^2 + 5(3)$$


$$= 36 + 15$$

$$q(t) = 51 \text{ C}$$

Que: The power supplied by a certain battery is constant, 6 W for the 1st 5 min. then 0 for the following 2 min. the value that increases from 0 to 10 W for the next 10 min. and a power that decreases linearly from 10 W to 0 in the following 7 min.

① What is the total energy in J. expended during this 24 min. interval. second.

② What is the avg. power in Watt during this time.

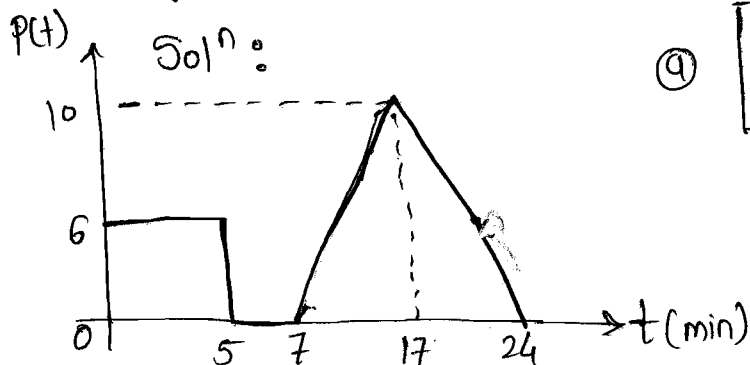

$$\textcircled{1} \quad W = \int_0^t P(t) \cdot dt$$

$$= [6 \times 5] + \left[\frac{1}{2} \times 10 \times 10 \right] +$$

$$\left[\frac{1}{2} \times 10 \times 7 \right]$$

$$= [30 + 50 + 35] \times 60$$

$$= (115 \times 60)$$

$$W = 6900 \text{ J}$$


⑥

$$P_{av} = \frac{1}{T} \int_0^T P(t) \cdot dt$$

$$\frac{W}{T} = \frac{115 \times 60}{24 \times 60}$$

$$P_{av} = \frac{115}{24} = 4.79 \text{ W}$$

Que: The Waveform shows has a period of 10 sec.

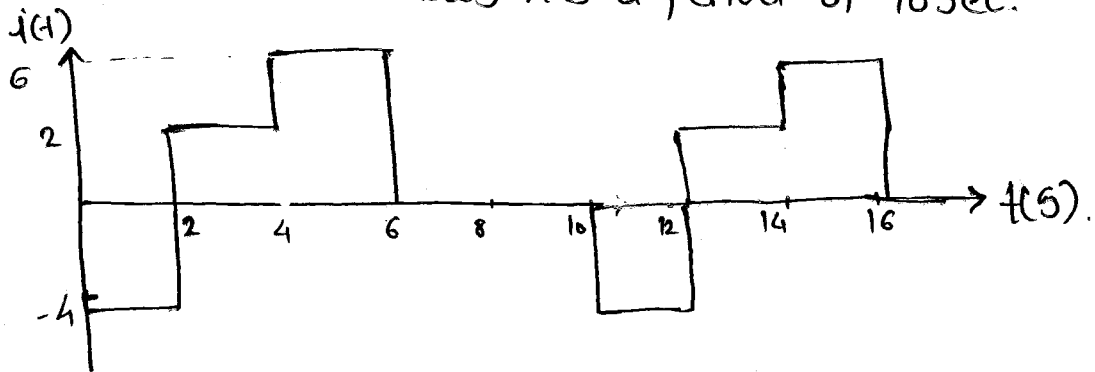

④ What is the avg value of $i(t)$ over one period.

⑤ How much charge is transferred in time interval 0 to 12 sec.

⑥ If the initial charge is '0' then sketch $q(t)$ for time interval 0 to 16 sec.

Solⁿ:

$$I_{avg} = \frac{1}{T} \int_0^T i(t) \cdot dt$$

$$= \frac{1}{10} [(-4 \times 2) + (2 \times 2) + (6 \times 2)]$$

$$= \frac{1}{10} \times [-8 + 4 + 12]$$

$$= \frac{16-8}{10}$$

$$= \frac{8}{10}$$

$$I_{avg} = 0.8 \text{ A}$$

$$\textcircled{b} \quad q(t) = q(0) + \int_0^t i(t) \cdot dt.$$


$$= 0 + [-8 + 4 + 12 - 8]$$

$$q(t) = 0 \text{ C}$$


\textcircled{c} Step $\xrightarrow{\int}$ ramp

$$\int a \cdot dt = \overset{\text{slope}}{at}$$


$$q(t) = 0 + \int_0^t i(t) dt$$

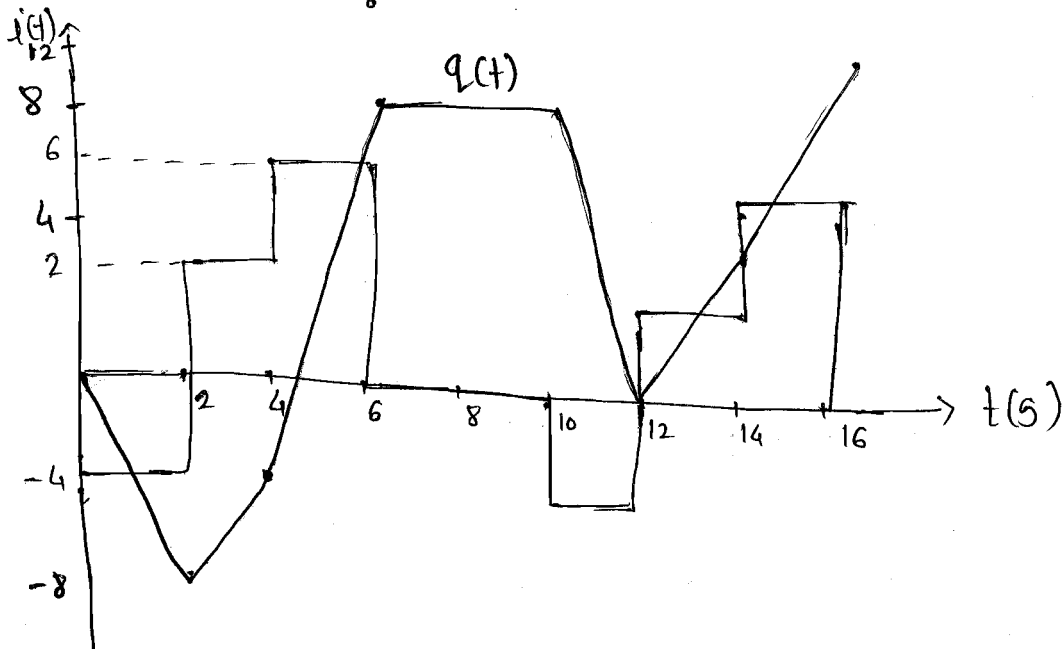

Lec-4



$$Z = \frac{L}{R}$$



$$Z = RC$$

Interview:

In given ckts.

RL, Why T.C. (Z) $\propto \frac{1}{R}$

RC, Why T.C. (Z) $\propto R$


Circuit Elements:

ckt elements can be completely characterised based on its V-I characteristics:

① Resistor: - If voltage across an element is linearly proportional to the current flowing through it, then that element is called as Resistor.

- Resistor is an element having a property of resistance.

Resistance can be described as that property of circuit element which offers the opposition to flow of the current & in doing so it converts the electrical energy into heat energy.



$$P = V \cdot I$$

$$P = (IR) \cdot I = V \cdot \frac{V}{R}$$

$$P = I^2 R = \frac{V^2}{R}$$

$$W = \int_0^t P \cdot dt$$

$$= \int_0^t I^2 R \cdot dt = \int_0^t \frac{V^2}{R} \cdot dt$$

$$W = I^2 R \cdot t = \frac{V^2}{R} \cdot t$$

$$R = \frac{W}{I^2 t}$$

$$W = \int_0^t (I^2) R \cdot dt$$